


LIKO-SPACE® SYSTEM

MOBILE WALL | GLASS PANEL

One, two or maybe three rooms.
Constructing and unfolding the sliding wall
can be handled quickly and effortlessly
by one person in a few minutes.

The entire surface of the panel is glass with
a hidden wooden frame and roller system.

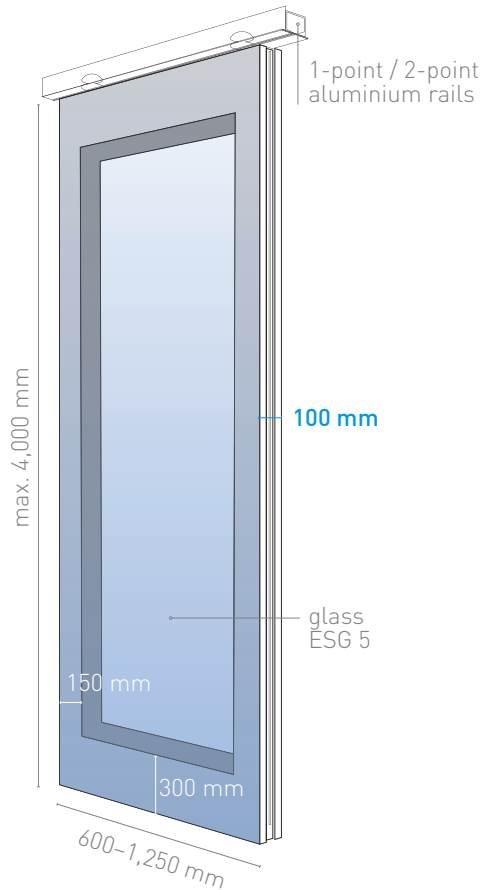

TECHNICAL SPECIFICATIONS

BASIC INFORMATION:

Use:	mobile wall rail system
Control:	manual handle fixation

AIRBORNE SOUND INSULATION R_w :

Glass panel:	37 dB
--------------	-------

STANDARD DIMENSIONS OF PANELS:

Thickness:	100 mm
Width:	600-1,250 mm
Height:	max 3,500 mm

MATERIAL SOLUTION:

Visible profiles:	aluminium profiles (anodized / komaxit according to RAL)
Glass filling surface:	ESG 4
Viewing frame:	wood – optional decor
Support frame:	steel
Rails:	aluminium one-point or two-point

HORIZONTAL SECTION

